


3021 SERIES



SPECIFICATION

RATING:	20(12) 250V~ T100 (UL, CUL, ENEC)
	10(4) 250V~ T100 5E4 (UL, CUL, ENEC)
	10/100A 250V~ T100 (UL, CUL, ENEC)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~100°C
ELECTRICAL LIFE:	10,000 CYCLES

SIZE

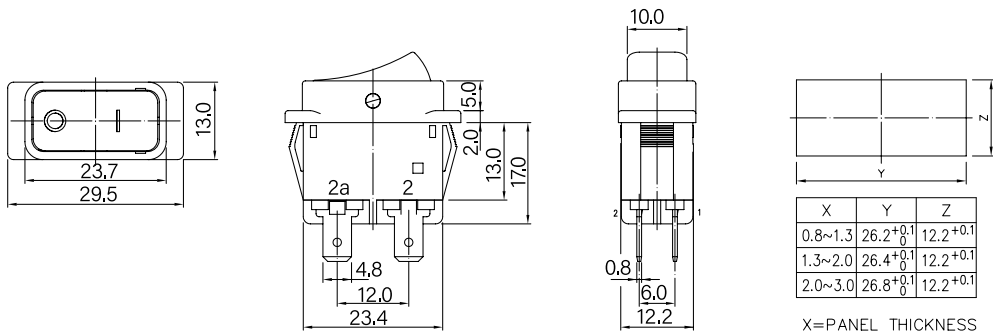

HOW TO ORDER

3021

KNOB

PRINT

LAMP

TERMINAL

CIRCUIT

BODY

KNOB COLOR

BODY COLOR

INSULATION MATERIAL

K1	
K2	
K3	

P0	
P1	
P3	
P5	

NONE	WITHOUT LAMP
L1	GREEN
L2	RED

T1		SOLDER
T2		4.8X0.8
T3		SOLDER
T4		6.4X0.8

D (DPST)	ON-OFF
S (SPST)	ON-OFF

B01	
B02	
B03	
B04	

BK	BLACK
SW	SNOW WHITE

BK	BLACK
SW	SNOW WHITE

NONE	UL94V-2
V0	UL94V-0